



WMO Aviation Seminar under the Joint CAS/CAeM AvRDP

MET ATM under CARATS


Collaborative Actions for Renovation of Air Traffic Systems


August 2019

Yuki Kato
Japan Meteorological Agency (JMA)

Consideration of long-term vision

- 2009 - 2010 Development of long-term vision
 - Establishment of “Study group for Promoting Renovation of the Air Traffic System”
 - Development and promulgation of “Collaborative Actions for Renovation of Air Traffic Systems” (CARATS)
- 2010 - 2011 Development of roadmap for each measures
 - Establishment of “Committee for Promoting Renovation of the Air Traffic System”
 - Consideration of concrete measures and development of roadmap
- 2011 - Implementation Phase

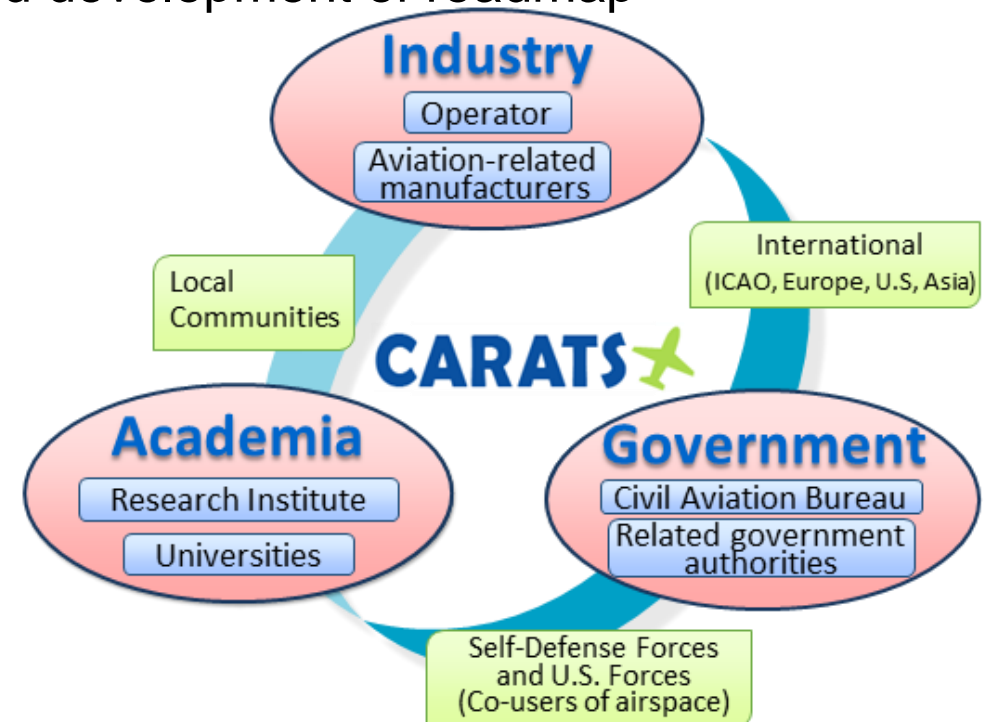

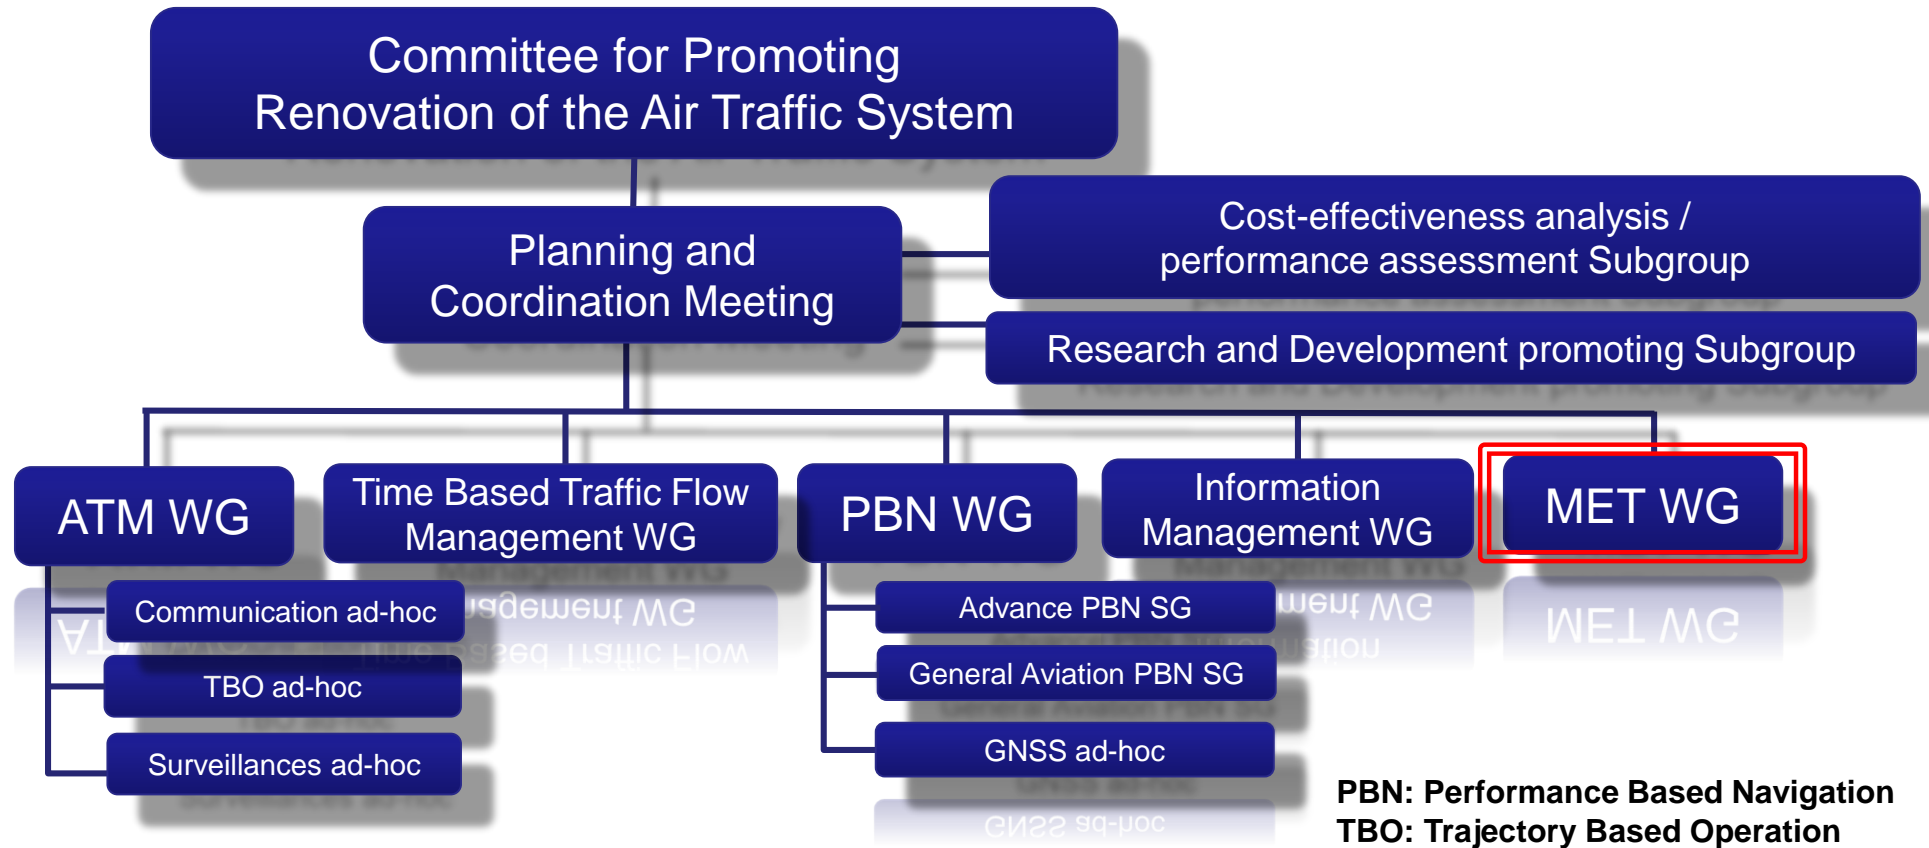

- There are five working groups and relevant ad-hoc groups and sub groups.
- All of the groups carry out collaborative activities between airlines, research institutes, manufactures, JCAB (Japan Civil Aviation Bureau), JMA (Japan Meteorological Agency) and other government organizations.
- Assessments with cost-benefit analysis are required before implementation of each measure.

Development of indicators for checking the status of implementation of the CARATS measures
 Progressing CARATS measures steadily and monitoring and analyzing them continuously

Objective and Numerical target	Outline of indicator
1 Enhancing safety (Increase safety level by 5 times)	The number of aircraft accident and important incident resulting from ATC (the average number for the past five years)
2 Responding to the increase in air traffic volume (Double the air traffic control capacity in congested airspace)	(Under consideration)
3 Improving user conveniences (Improve services level by 10%)	Punctuality : The rate of the arrival delay flights exceeding 15 minutes
	Actual operation rate : The flight cancellation rate by the influence of the whether (the average rate for the past three years)
	Rapidness: Flight time of Gate-to-Gate of main routes.
4 Improving operational efficiency (Reduce fuel consumption per flight by 10%)	The amount of the fuel consumption per flight in main routes
5 Improving productivity of air traffics services (Improve productivity of air traffic services by 50% or more)	The flight plan operation number of each air traffic controller
	The flight plan operation number to the maintenance expense (the average number for the past three years)
6 Responding to environmental issues (Reduce CO2 emissions per flight by 10%)	The amount of the CO2 emissions per flight in main routes
7 Enhancing the international presence of Japan in the aviation field	(Qualitative objective)

Objectives to be achieved by 2025 (clarifying numerical targets)

Direction of renovation in CARATS

4. Realizing Satellite-based Navigation for All Flight Phases

Aircraft can determine position and time accurately in all FIR of Japan by Satellite-based navigation

1. Realizing Trajectory-based Operation (TBO)

Fly regularly on a pre-coordinated trajectory from departure to arrival

Accurate time-based management

3. Promoting Performance-based Operation (PBO)

5. Enhancing Situational Awareness on the Ground and in the Air

Cooperation between ground and air, Information sharing

Integrated ATC processing system


8. Realizing High-density Operation in Congested Airports and Airspace

2. Improving Predictability

The calculation of air traffic control capacity, Estimation of traffic flow, Improving of predictability of meteorological phenomena

6 Making Maximum Use of the Capability of Human Beings and Machines

7. Complete information-sharing and Collaborative Decision-Making

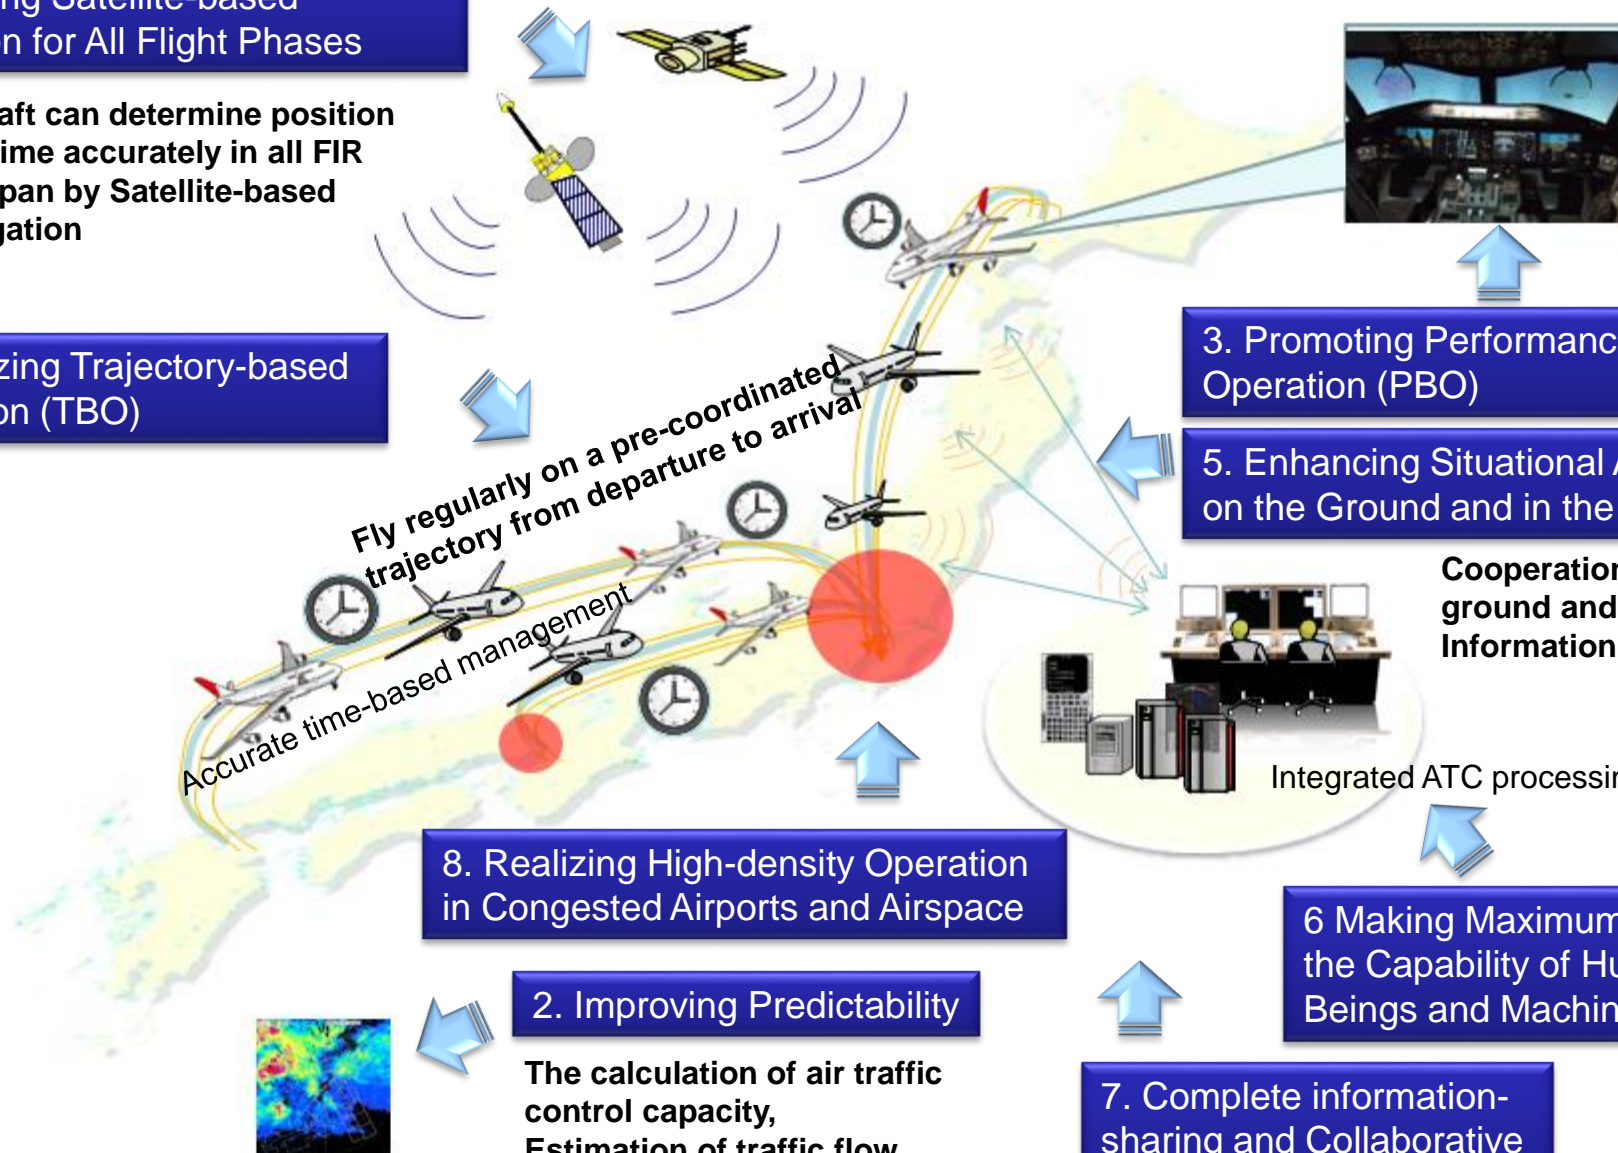

CARATS Roadmap

Operational Improvements: OI
(improve operation)

Enablers: EN
(technology for enabling OI)

Measures of aviation weather

ALL measures of **aviation weather** are enablers (EN)

Improved weather observation capabilities

- Integration of observation data around aerodrome and air spaces

Improved weather forecast capabilities

- Development of NWP model with high frequency and resolution
- Expansion of forecast elements


Quantification of the impact of severe weather on capacity and other aircraft operations

- Estimation of impact on ATM using MET information
- Translation from MET data to airport/airspace capacity

MET information sharing infrastructure


- Sharing of weather information with standardized format on SWIM environment


The roadmap specifies 64 measures that need to be taken in order to achieve the CARATS, and categorizes them into measures intended to improve operation (operational improvements (OI)) and measures relating to technology necessary for enabling such improvement (enablers (EN)).

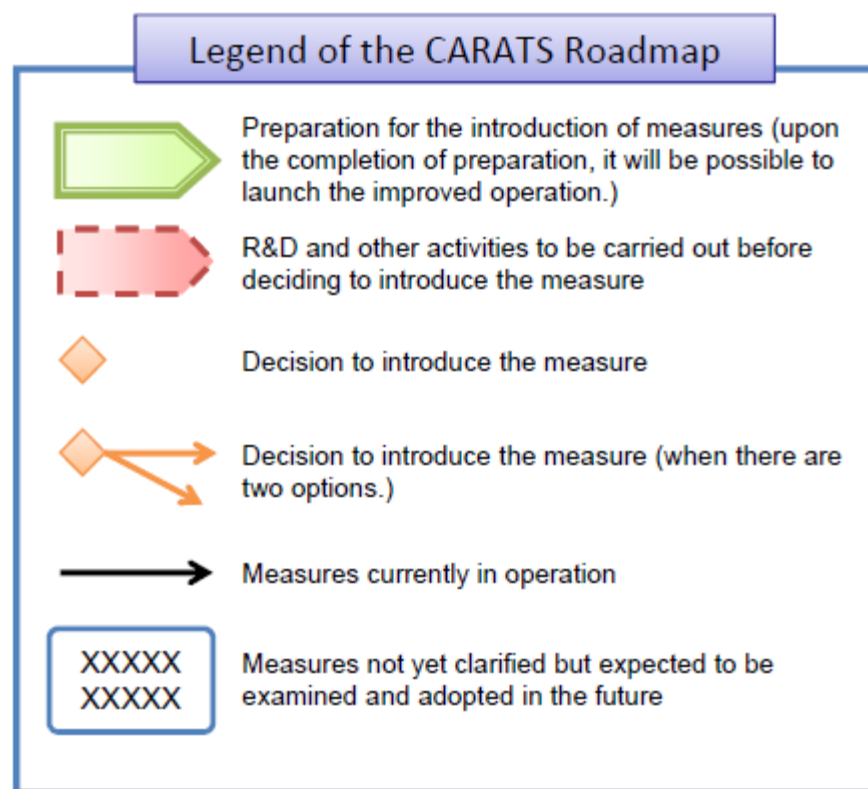


Please note that following table may differ from current version.

OI (operational improvements): measures intended to improve operation.

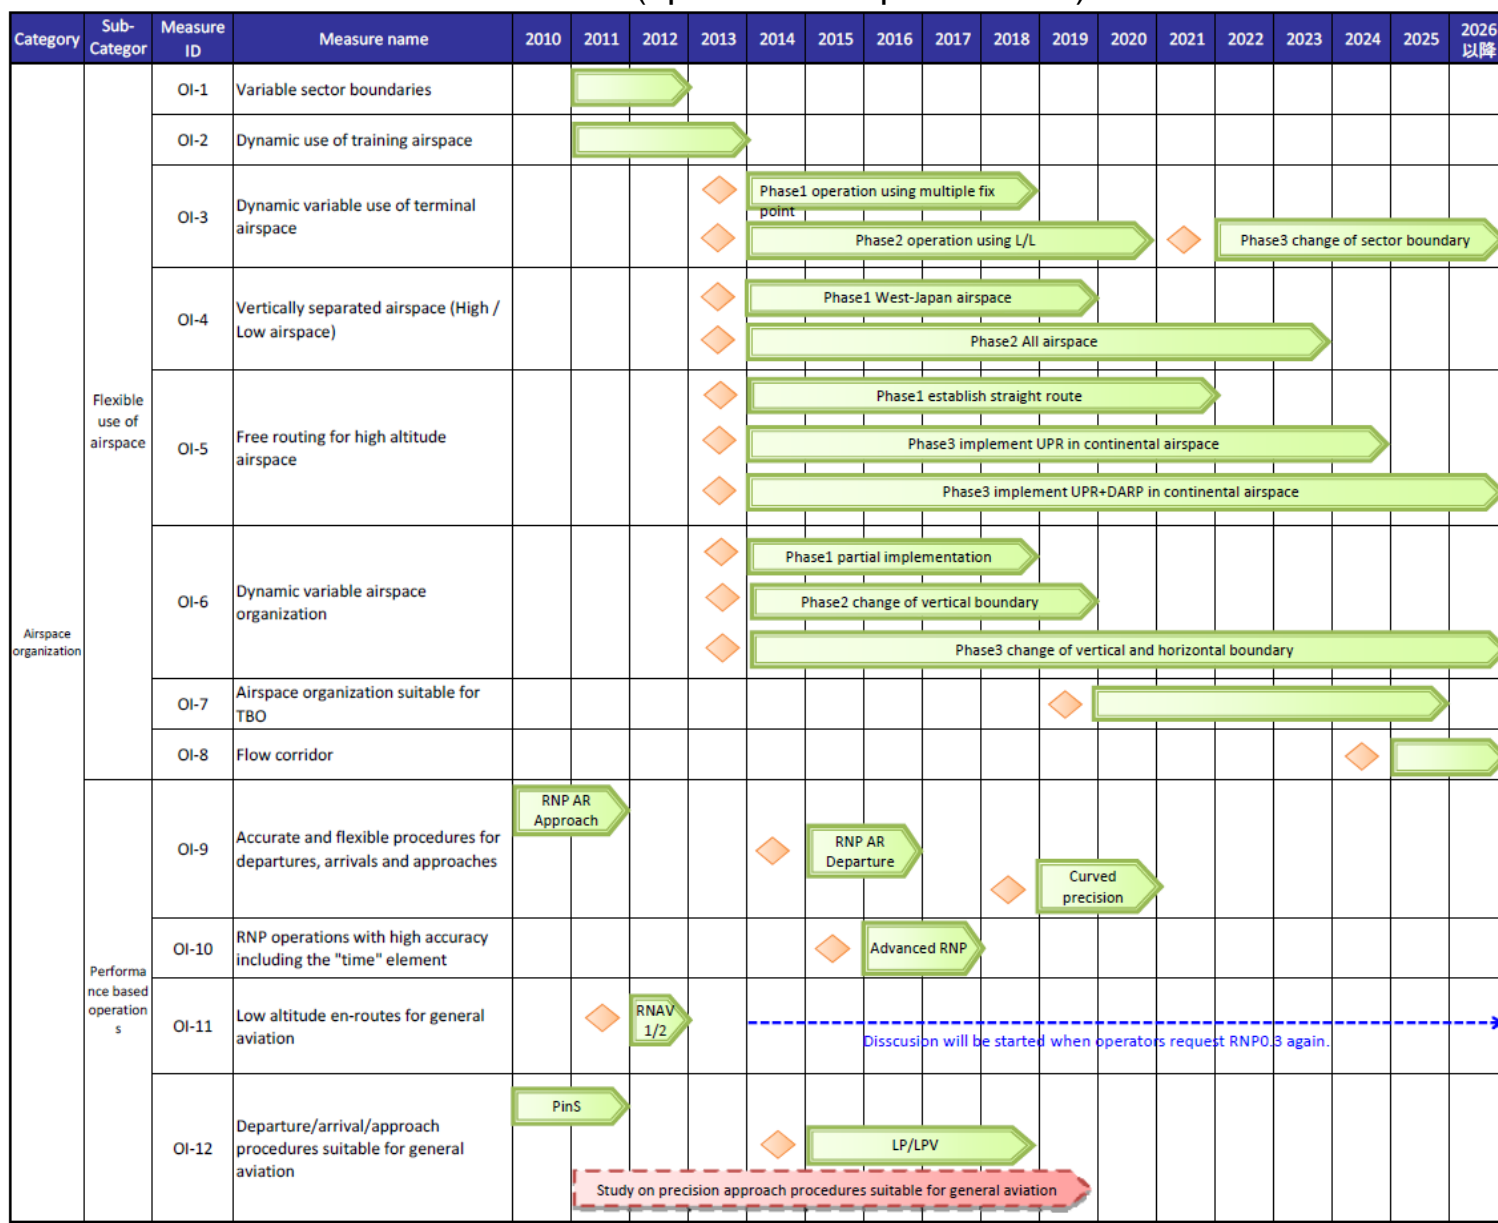

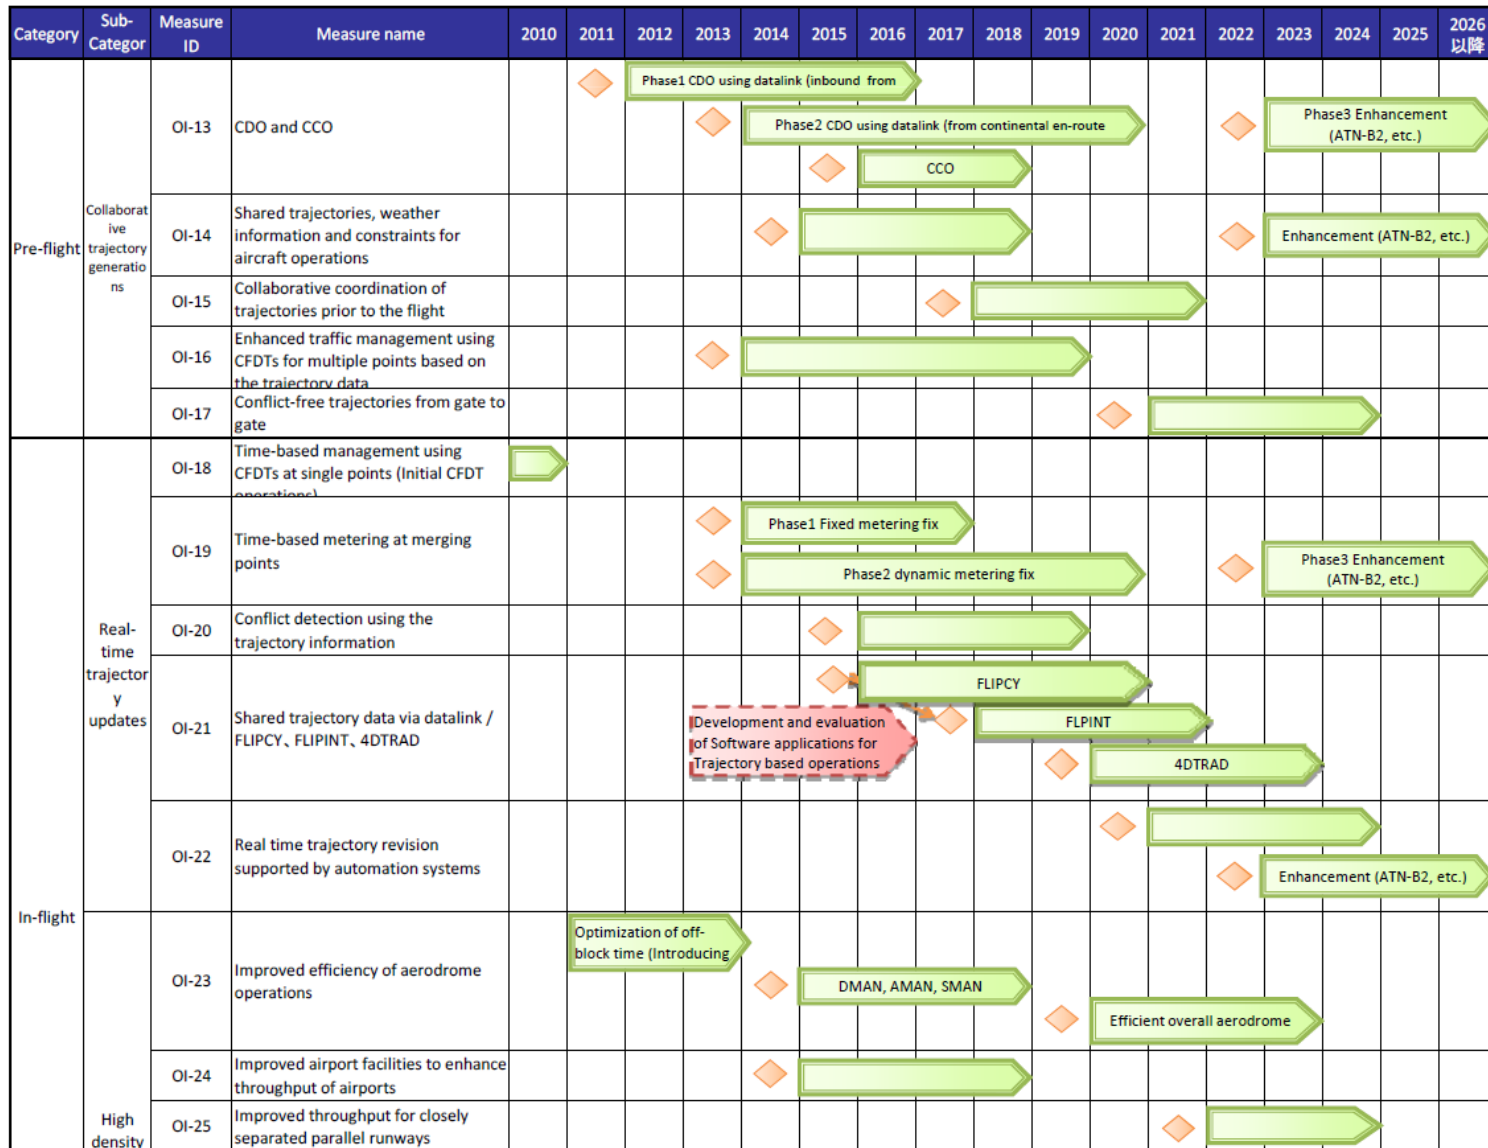


Roadmap OI (3)

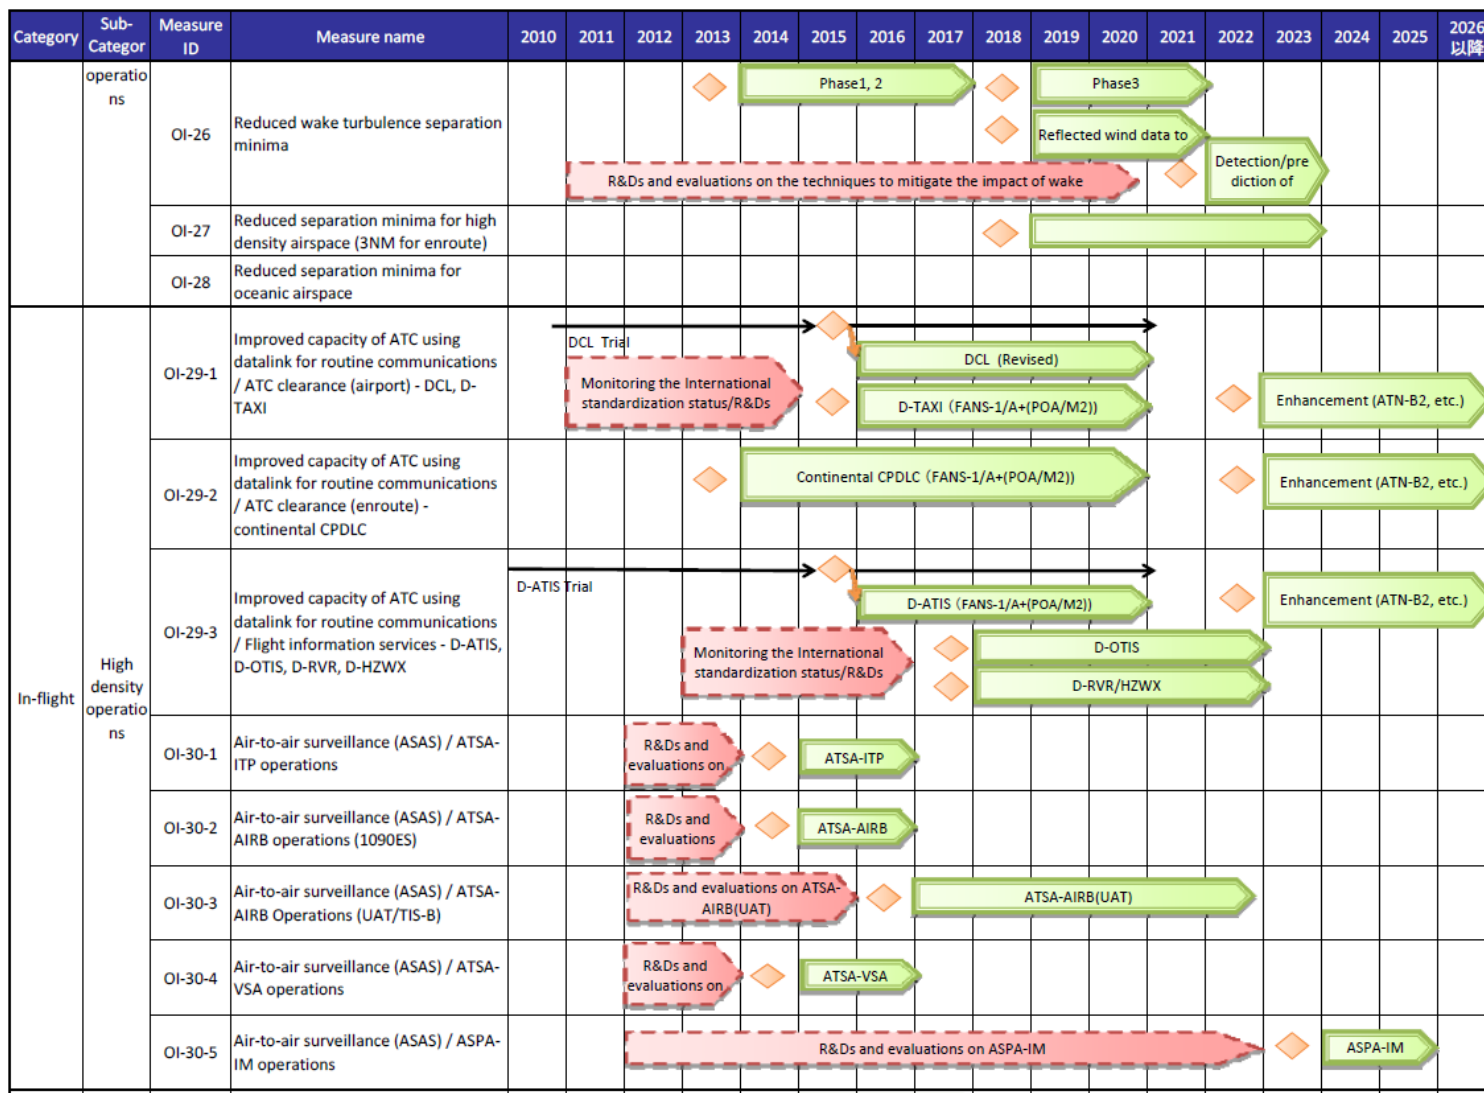

Category	Sub-Category	Measure ID	Measure name	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026 以降
In-flight	Improved information services	OI-31	Enhanced information in the cockpit		Monitoring the International standardization status				Weather information							Aeronautical information				
								Traffic information												
								Terrain / obstacle												
		OI-32	Improved information services for aircraft operators		Monitoring the International standardization status /								Provided effective information to operators							
Post-flight	Sharing and utilizing safety related information	OI-33	Sharing and utilizing safety related information	Implement SSP																
								accumulation/analysis/evaluation of acquired safety information												
																Study on real time risk management				
																	Real time risk management			


EN (enablers): measures relating to technology necessary for enabling OI.

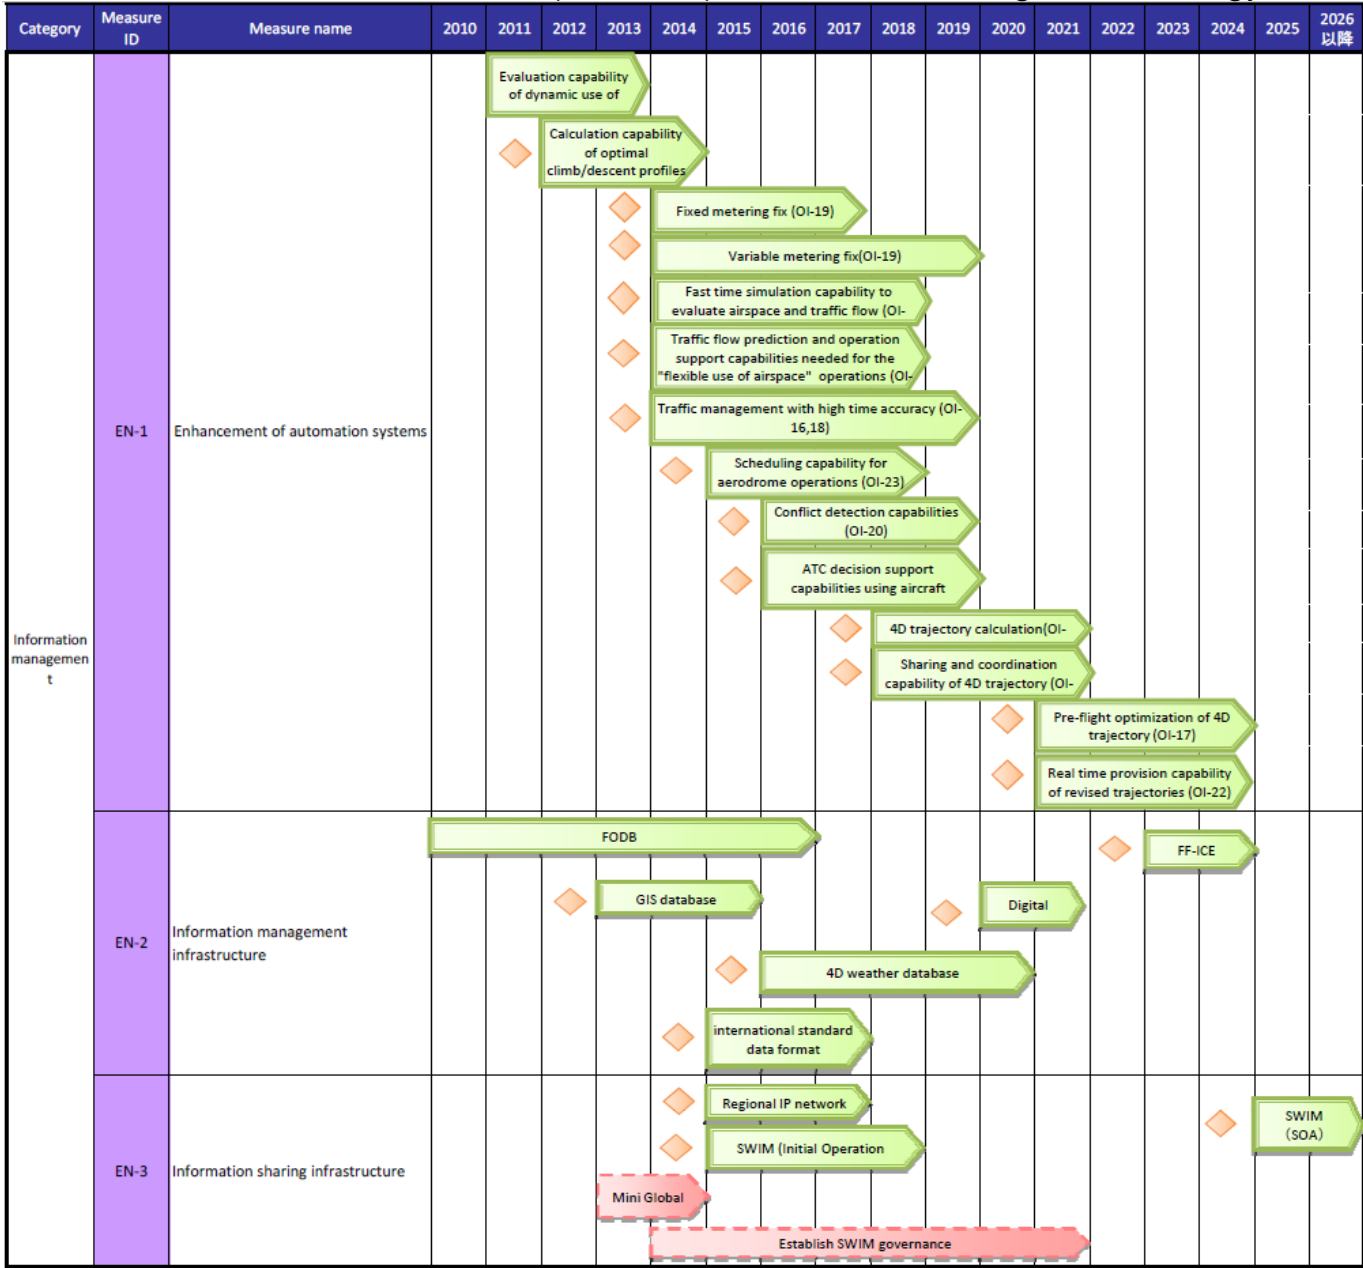


MET



Category	Measure ID	Measure name	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026 以降
Weather information	EN-4-1	Enhanced weather observation data / Integration of observation data for airport and airspace				◆	Integrated display for observation			◆	Integration of observation data for airport and airspace								
	EN-4-2	Enhanced weather observation data / Enhanced observation data elements for airport and airspace			◆	Weather radar echo	◆	Small type of radar / lidar											
							◆	Wind Profiler											
							◆	Thunder observation system											
	EN-4-3	Enhanced weather observation data / Use of airborne observed weather data								◆	Utilization of weather data observed by aircraft								
	EN-4-4	Enhanced weather observation data / New types of sensor data and enhancement of existing sensors							◆	New Observation data using									
										Decisions will be made based on									
	EN-4-5	Enhanced weather observation data / Enhanced observation of volcanic ash																	
										Decisions will be made based on									
	EN-5-1	Enhanced weather observation data / Use of enhanced observation data																	
	EN-5-2	Enhanced weather observation data / More precise weather forecast models																	
	EN-5-3	Enhanced weather observation data / Provision of new weather forecast data			◆	Enhanced weather forecast													
					◆	Frequent forecast data provision													
					◆	Enhanced weather forecast													
	EN-5-4	Enhanced weather observation data / Quantification of weather forecast error								◆	Quantification of weather forecast error								
	EN-6	Quantification of the impact of severe weather on capacity and other aircraft operations																	

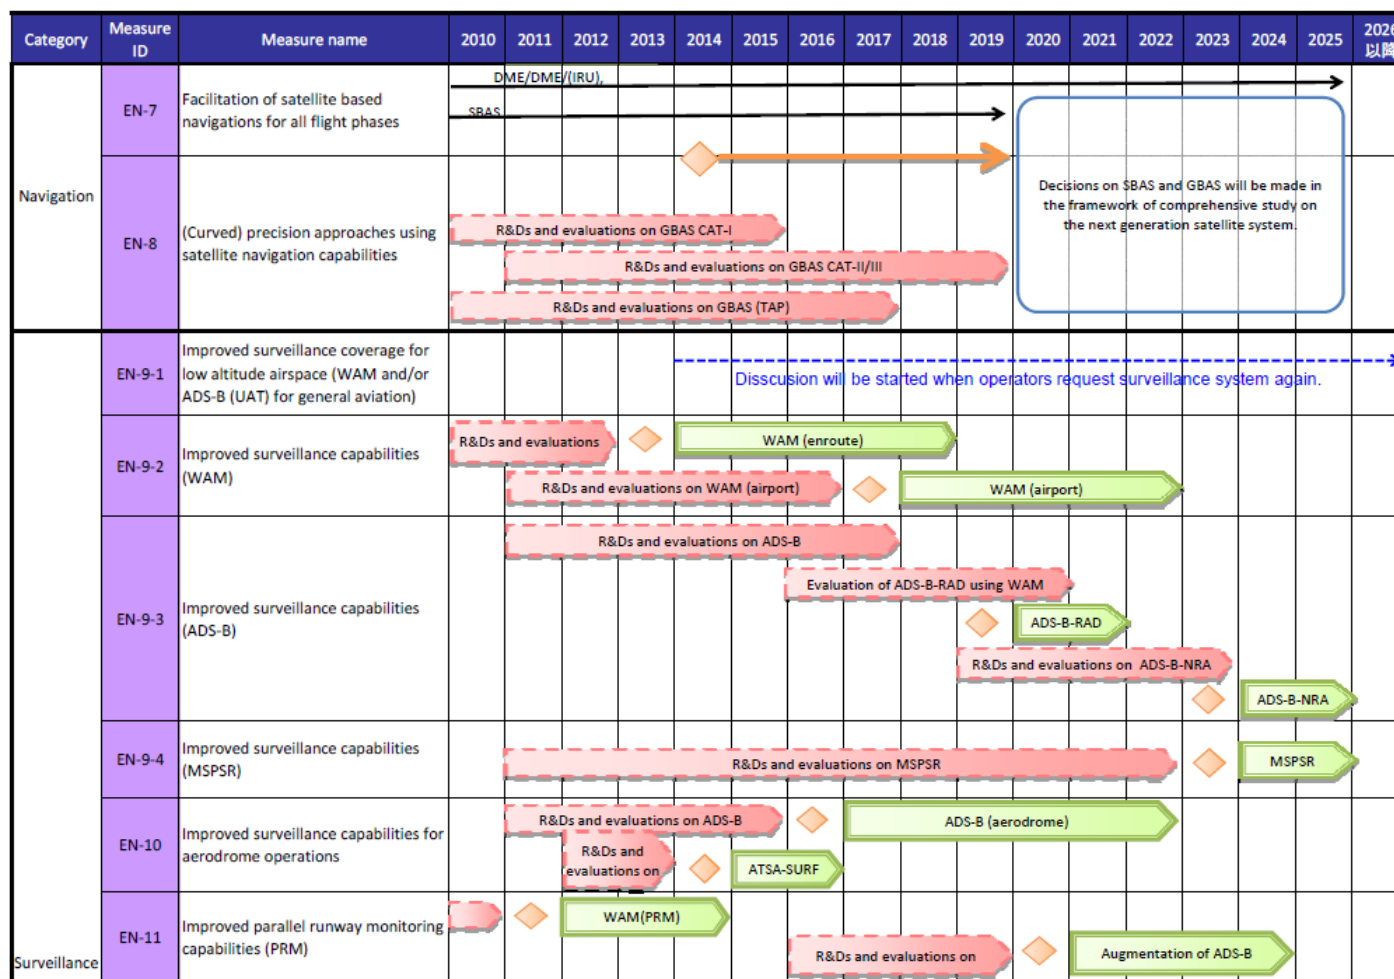

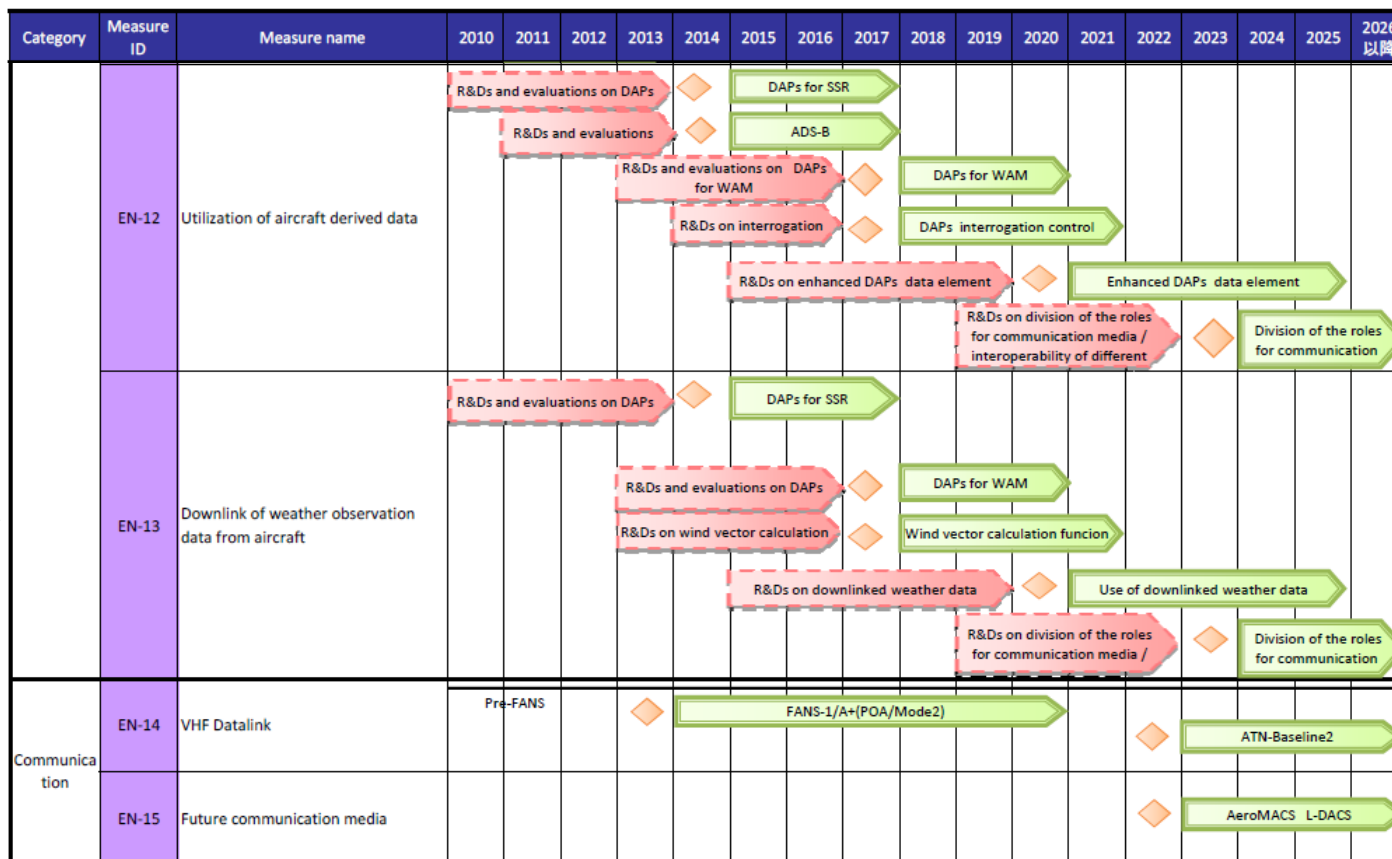

DAPs: Downlink Aircraft Parameters
SSR: Secondary Surveillance Radar
WAM: Wide Area Multilateration


Improved weather observation capabilities



RADAR

LIDAR

HND and NRT



Airport Doppler Radar Administration System In JMA(ADRAS)

Real time data of 6 sec intervals




Anemometer

Data transmission System in JMA (ADESS)

Website of Aviation weather information in JMA (MetAir)

ALWIN (Airport Low-level Wind Information)

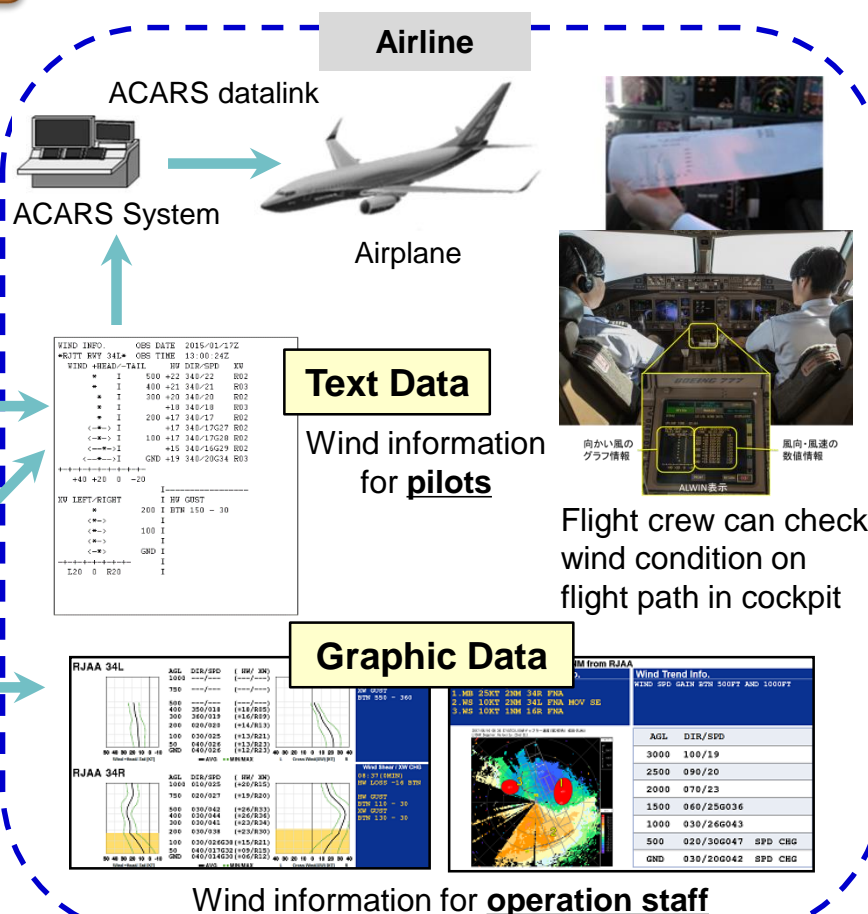


- Wind information detected by Doppler RADAR and LIDAR and measured by anemometer is converted into both graphic data and text data.
- Text data is transmitted to pilots in cockpits via the ACARS system.
- Airline operation staff can obtain graphic and text data from JMA's dedicated website (MetAir).


Improved weather forecast capabilities

Development of high resolution NWP model


Grid size: 5 km

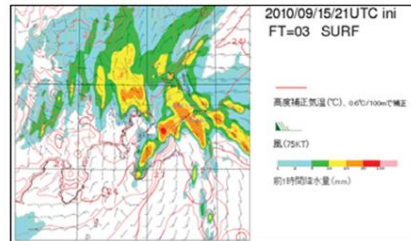


Grid size: 2 km

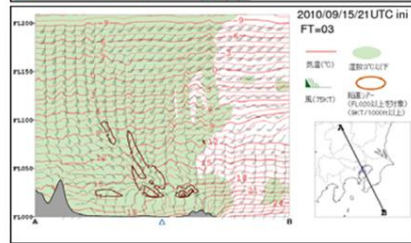

Meso-scale Ensemble Prediction System (MEPS)

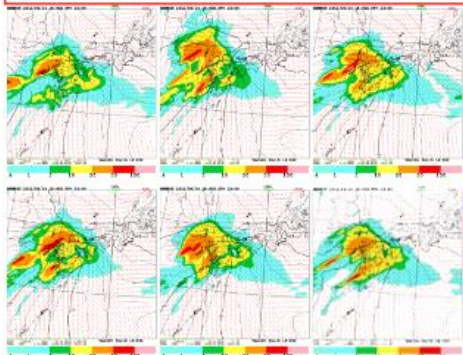


Perturbed forecasts(FT=15)

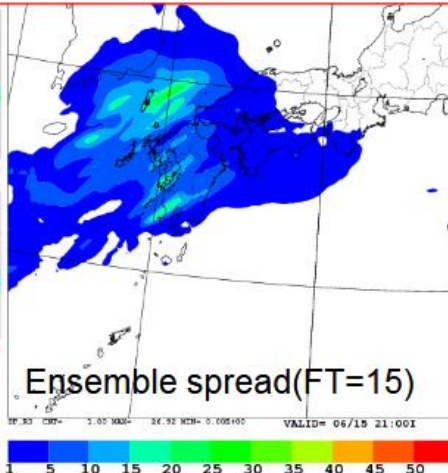


Ensemble spread(FT=15)

Probabilistic forecast using NWP, e.g. TB index

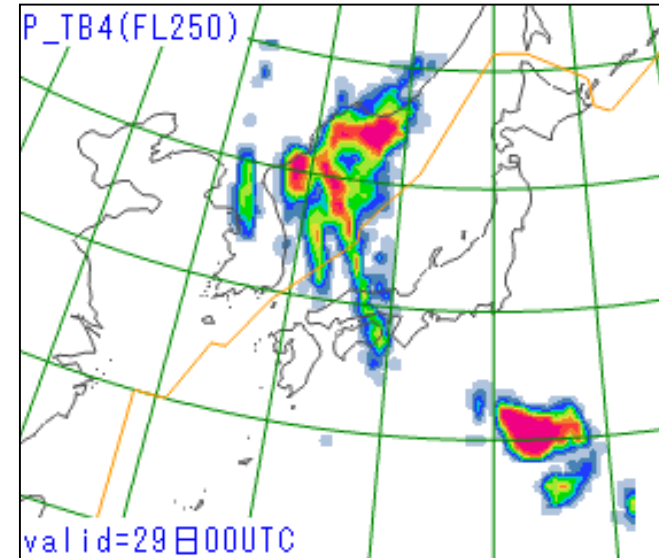

Use of aircraft data via data-link

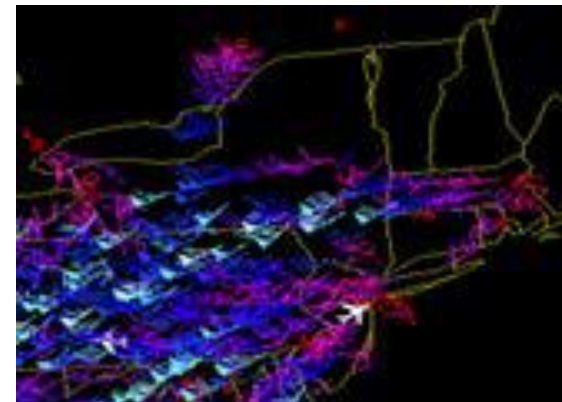


DAPs : Downlink Aircraft Parameters


Examples of the recent activities on MET in CARATS

MET integration into ATM decision support system


Current

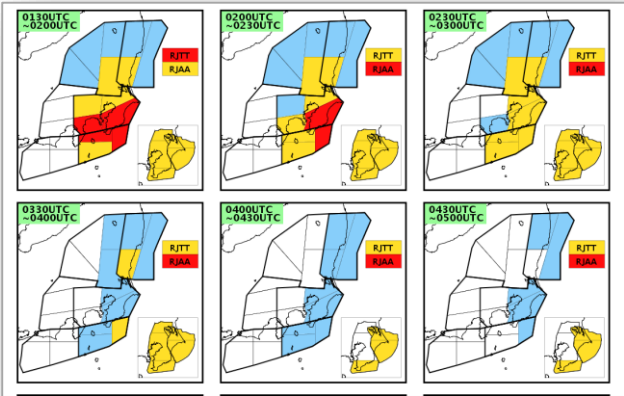


Future

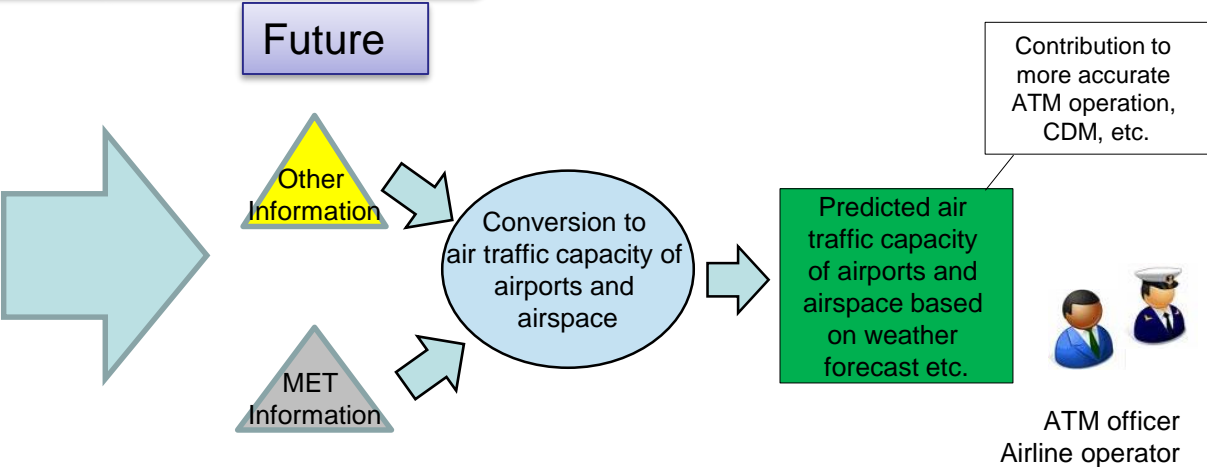

Advanced product using Himawari-8

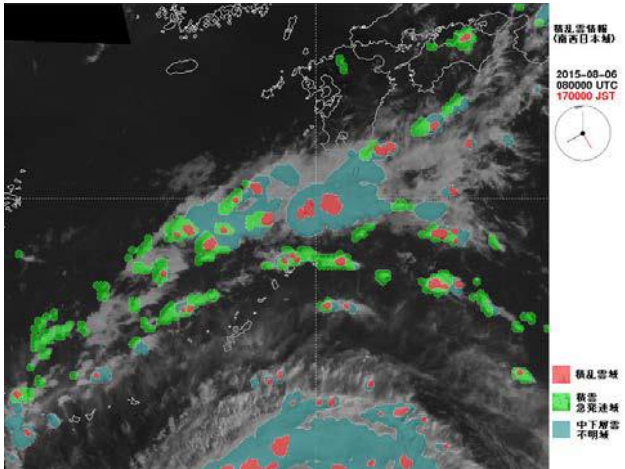

Red : CBA (Cumulonimbus Areas)
 Darkcyan: MLUA : (Mid/Low Cloud Unknown Areas)
 Green : RDCA (Rapidly Developing Cumulus Areas)

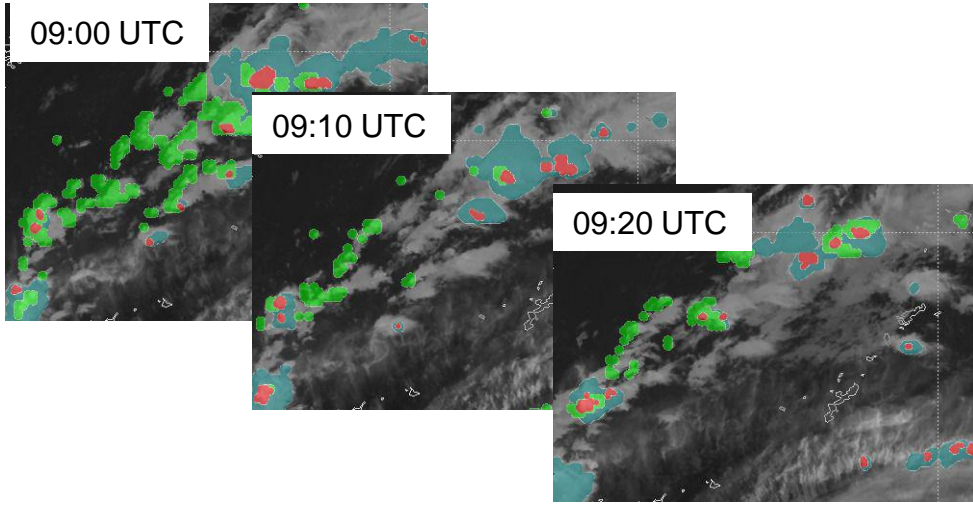


Improvement of Low-Level Wind Information


ALWIN (Airport Low-level Wind Information)

Conventional Low-level Windshear Information of JMA


Wind Shear (WS) affects airplane safety operation



WS Observation
in all weather conditions

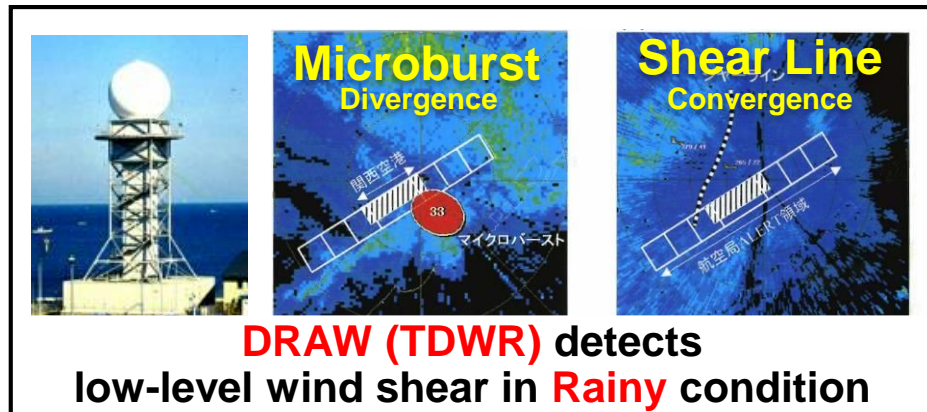


Doppler Radar for Airport Weather (DRAW, Japanese version of TDWR)
(from 1996)

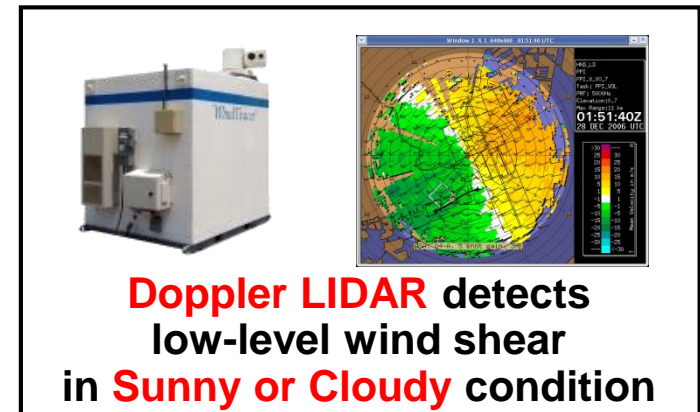

Light Detection and Ranging (LIDAR)
(from 2008)

Detection Area

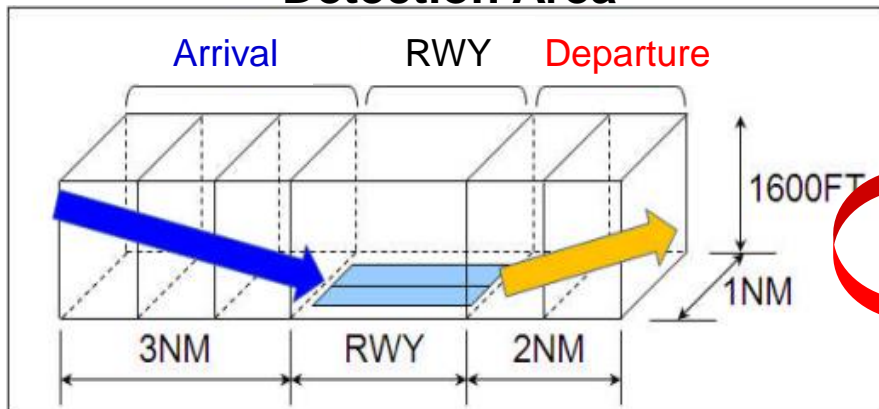

TDWR and LIDAR detects Shear Line(SL) and Microburst(MB). Those information are provided as WS Alert and MB Alert.

WS, MB alerts are simple text message, and contents are not enough.

Overview of Wind Shear and Microburst Alert

Wind Shear Alert

Over 20 kt Increase or Decrease of Head Wind Component


Microburst Alert

Over 30 kt Decrease of Head Wind Component

Example



0837 34LA MBA 39kt- 3nm FNL

- **0837** : Obs time in UTC
- **34LA** : 34L (RWY)
A: Arrival
D: Departure
- **MBA** : MBA (Microburst Alert)
WSA (Wind Shear Alert)
- **39kt-** : 39 kt (wind speed change)
+ : GAIN
- : LOSS
- **3nm FNL** : 3 nm (Position)
FNL (Arrival side)
DEP (Departure side)
RWY (Over Runway)

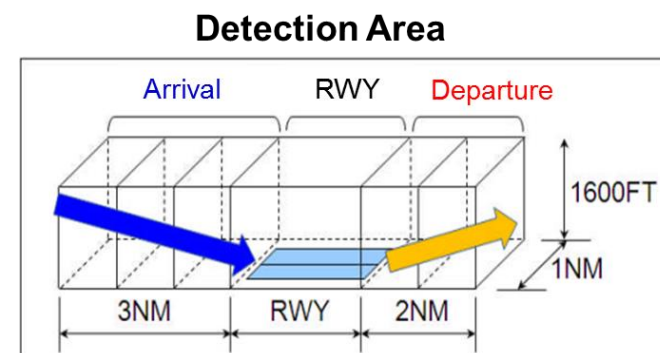


To provide new WS information, JMA started a collaborative research with JAXA (Japan Aerospace Exploration Agency). JAXA developed information providing system, called LOTAS.

(Low-level Turbulence Advisory System)

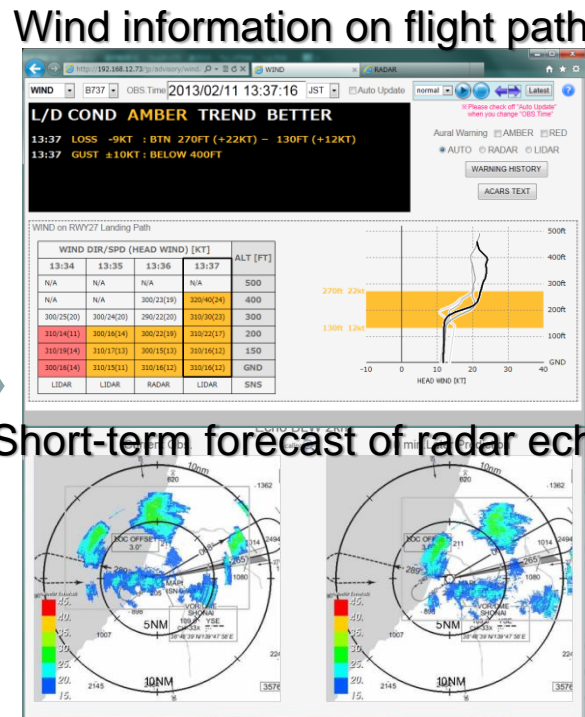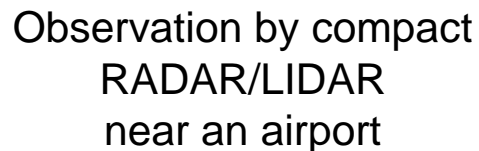

ALWIN Provision Flow


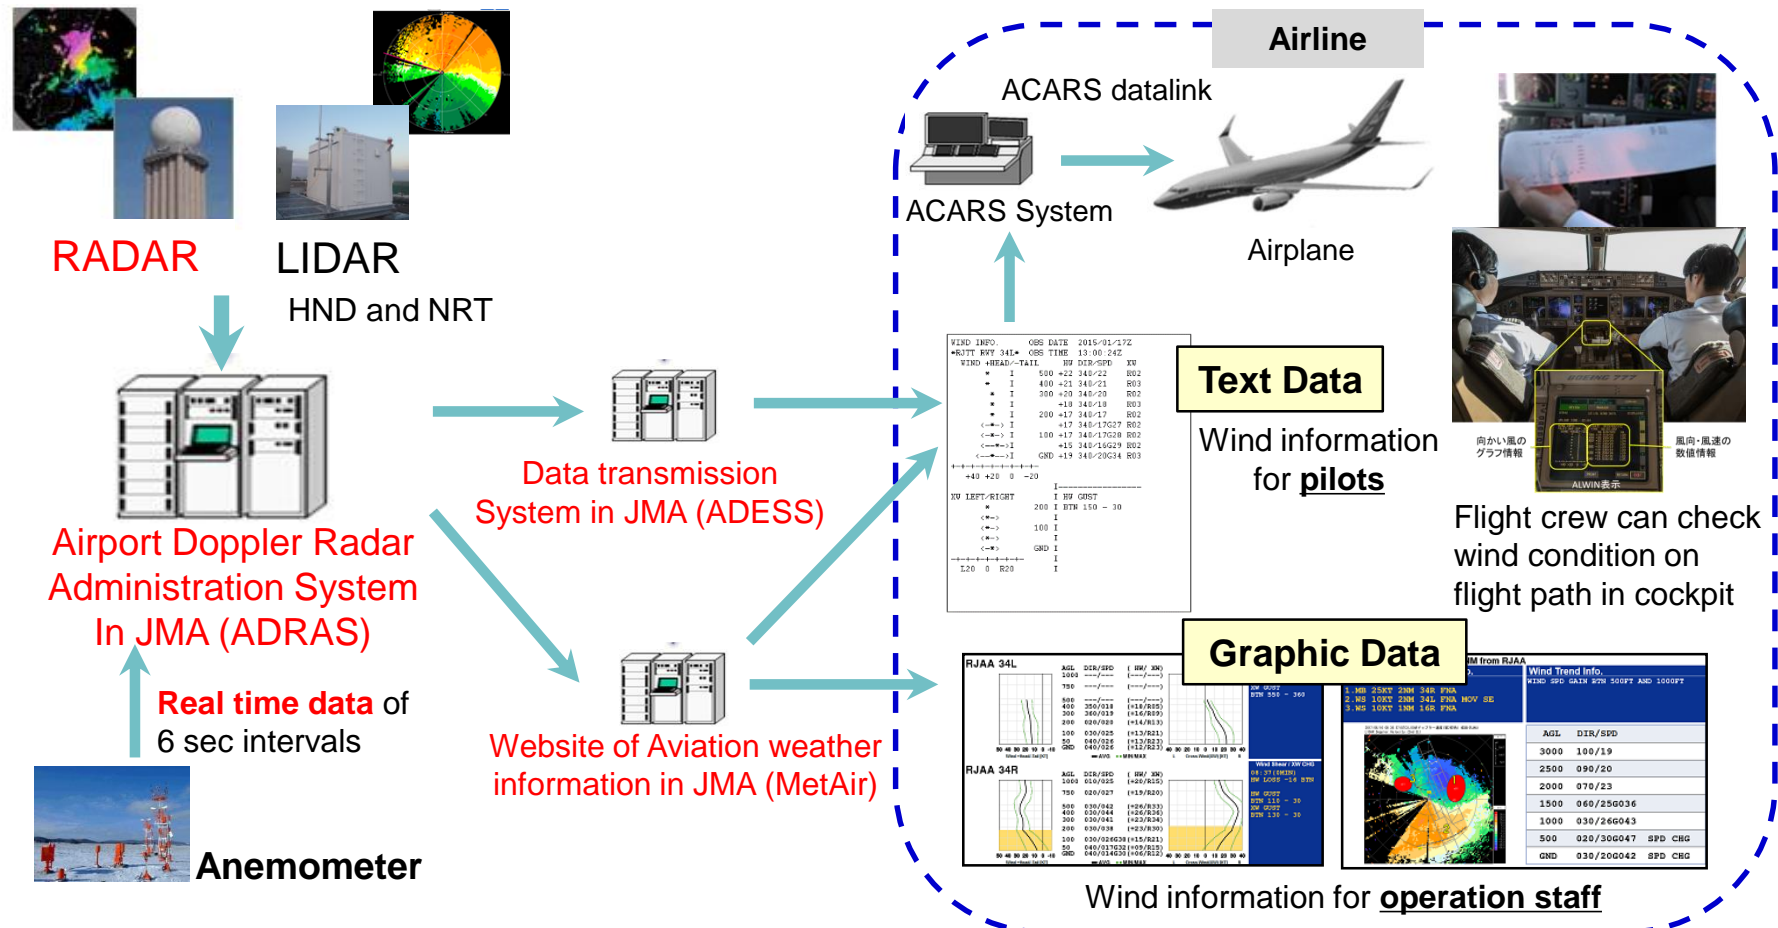


- Wind information detected by Doppler RADAR and LIDAR and measured by anemometer is converted into both graphic data and text data.
- Text data is transmitted to pilots in cockpits via the ACARS system.
- Airline operation staff can obtain graphic and text data from JMA's dedicated website (MetAir).


Display of Flight Path Wind Information

For Operation Staff




For Airplane

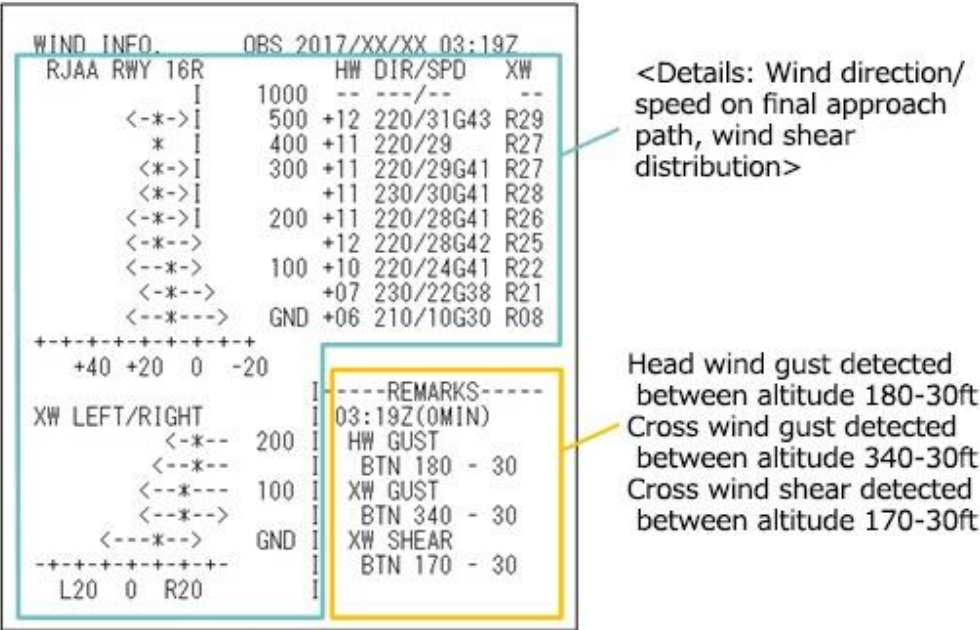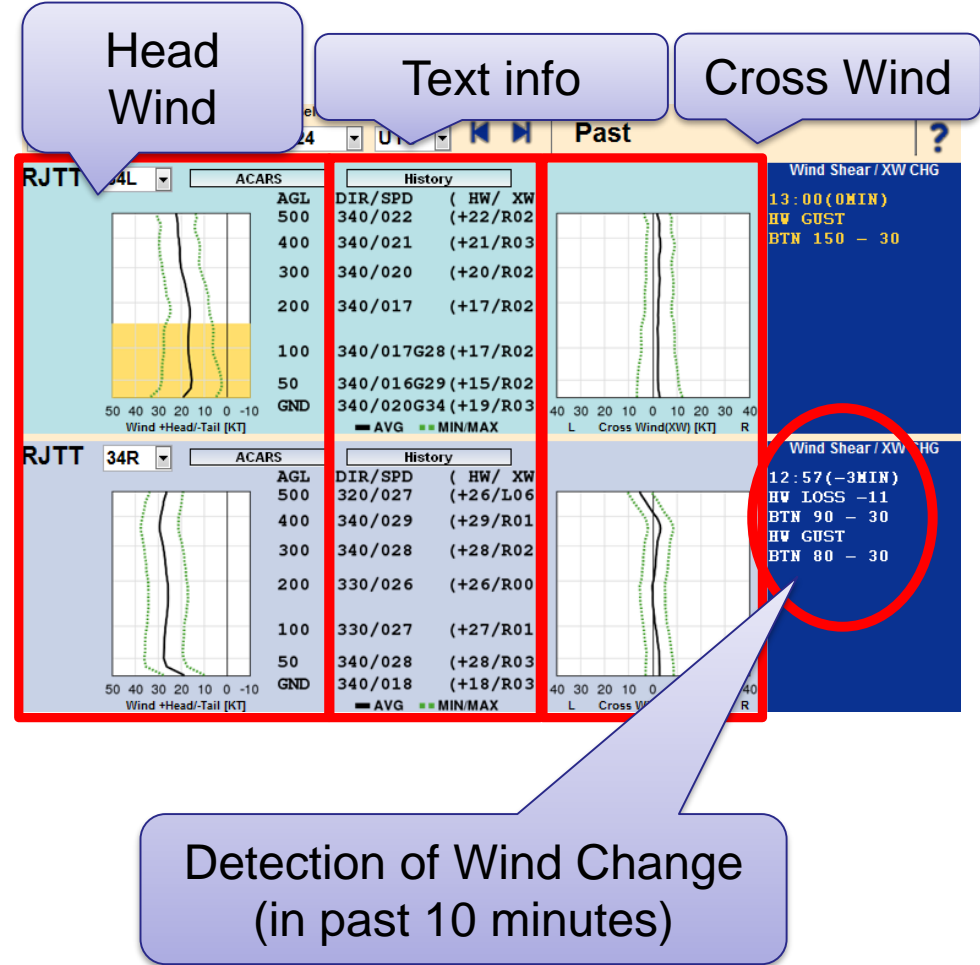

16R

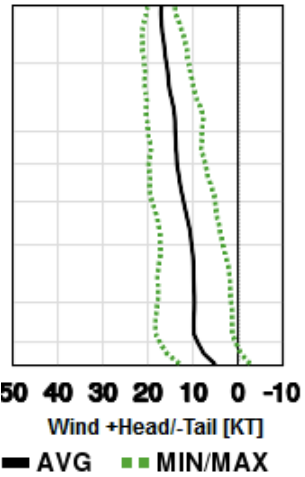

AGL
1000
750
500
400
300
200
100
50
GND

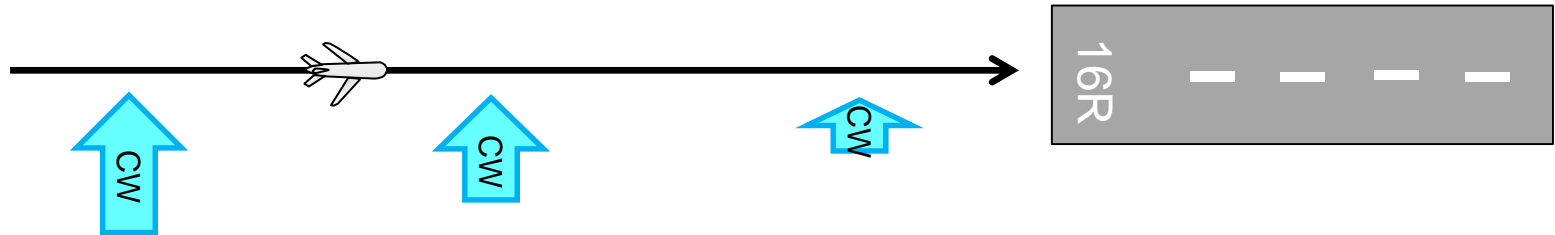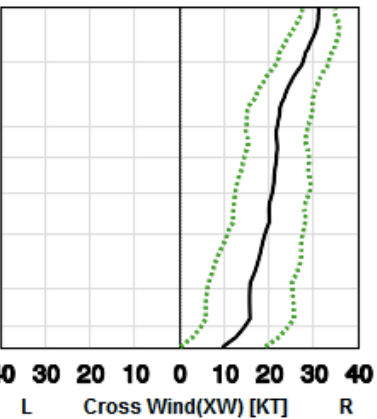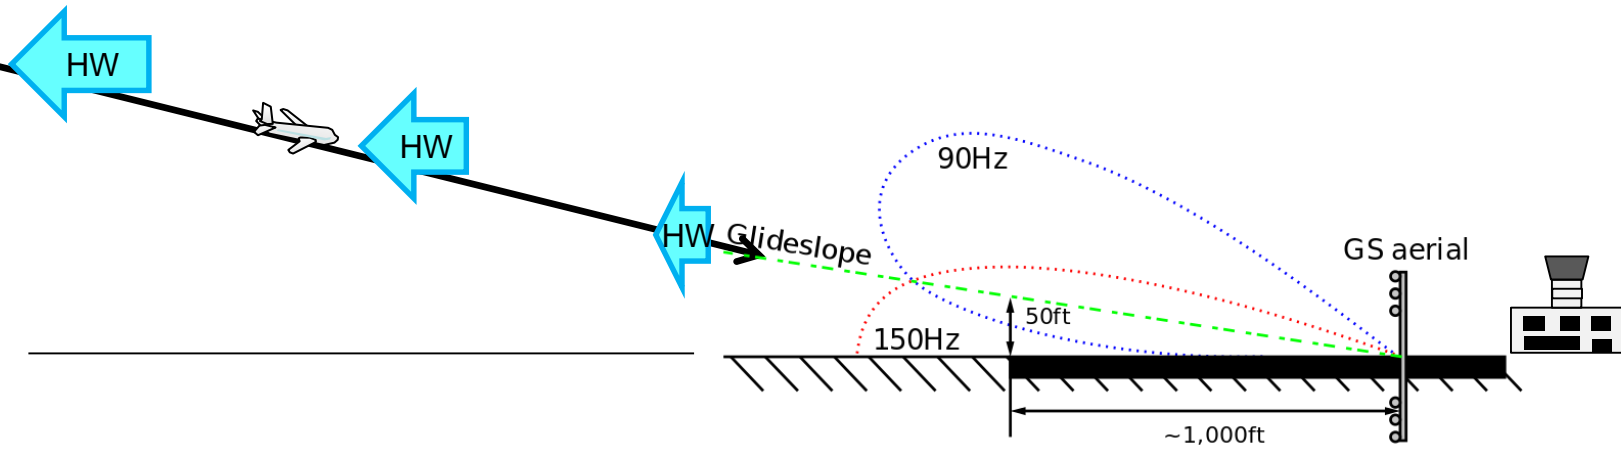

Display of Airport Information

For Operation Staff

For Airplane

Detection of Temporal Wind Change
(Wind Speed and Direction)

APT

Averaged Wind Info. within 5NM

Shear Line / Microburst Info.
16:48 (0MIN)
1. WS 15KT 3NM 16R FNA

RJAA

ACARS


History

Wind Trend Info.

RJAA 16					
AGL	DIR/SPD	CHG	HW	XW	
3000	320/41	-40		R10	
2500	310/40	-38		R12	
2000	310/38	-36		R14	
1500	310/34	-31		R14	
1000	300/30	*	-27	R14	
500	300/19	*	-16	R10	
GND	300/08	*	-07	R04	

2015/01/17 16:48:54 (UTC) LIDAR ドップラー速度 (第2仰角) 成田 (RJAA)

LIDAR Doppler Velocity (2nd EL)

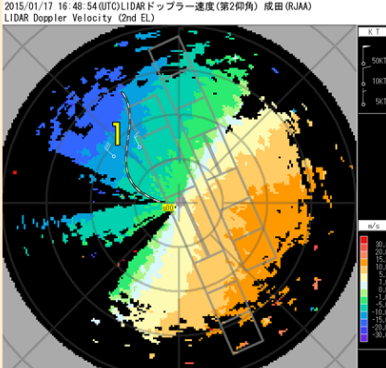

WIND INFO. OBS 2015/01/18 02:47Z
RJAA AIRPORT
AVERAGE WIND WITHIN 5NM FR

Wind Vertical Profile

AGL	DIR/SPD	CHG
3000	310/39	
2500	310/37	
2000	300/35	
1500	310/32	
1000	300/31	*
500	300/26	*
GND	300/16	*

Detection information

WS 5KT OVER A-RWY

SL/MB information
(position and moving direction)

3000	110/02	2500	VRB03
2500	020▽100/03		
2000	010/06		

Vertical Wind Profile
[*]indicating existence of large wind change
Wind variable/wind change is indicated by [VRB]or[V], like METAR


Display in a cockpit



by JAL


Head Wind Graph

Text information
(Wind speed/direction)


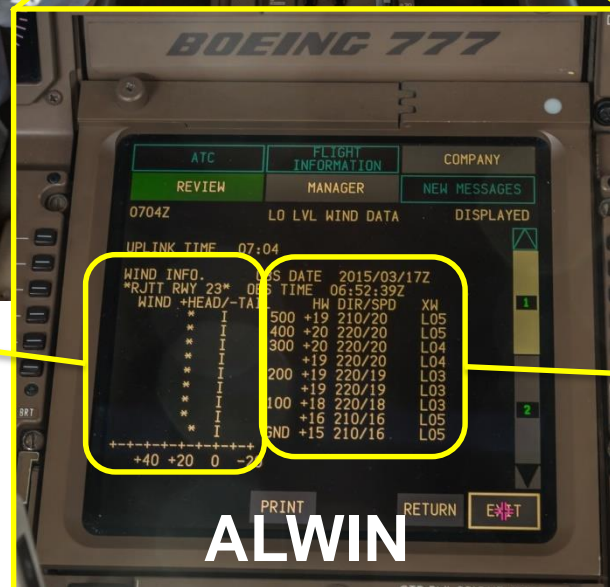


Accuracy of ALWIN Wind

Comparison of Doppler velocity and estimated wind

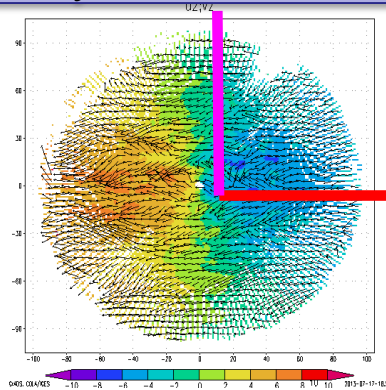

RMSE: 1 kt




Comparison with anemometer

	RMSE
Mean Direction (deg.)	6.48 deg
Mean Wind Speed	2.05 kt
Max Wind Speed	2.63 kt
Min Wind Speed	1.85 kt
Gust (Max - Mean)	1.61 kt

RMSE: 2-3 kt

Comparison with FDR (NRT 16R)

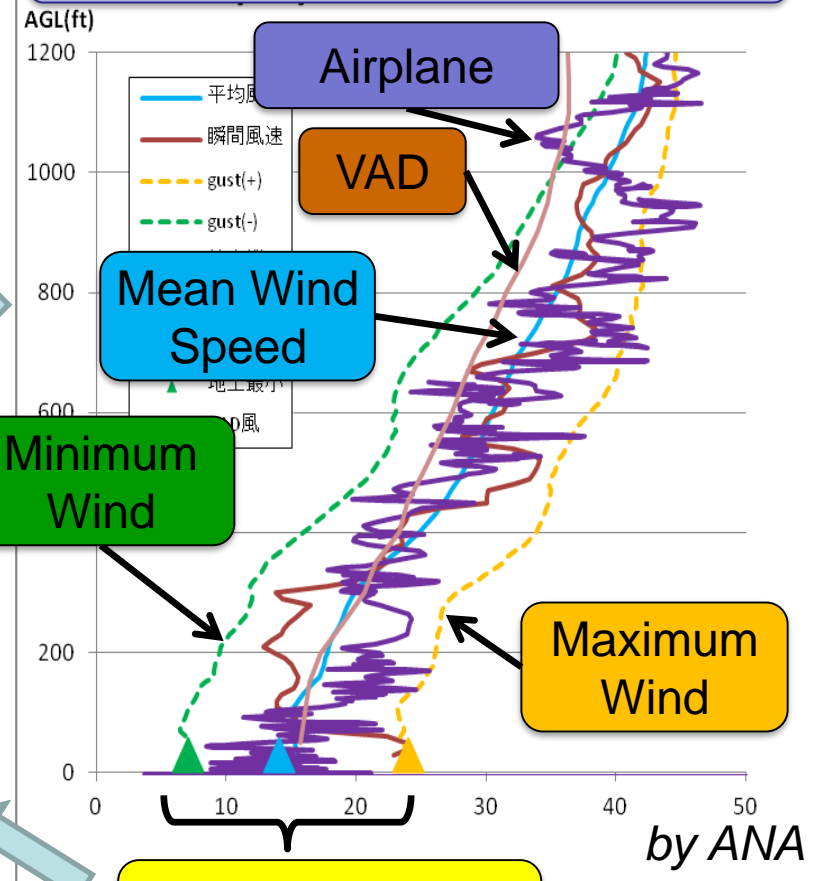


Utilization of aircraft-based observations (EN-4-3)


Utilization of aircraft-based observations in CARATS



EN-4-3 involves the utilization of in-situ aircraft-based observation data to improve situation awareness and accuracy of numerical weather prediction.

1. Wind direction and speed data calculated from DAPs (Downlink Aircraft Parameters) for SSR (Secondary Surveillance Radar) or WAM (Wide Area Multilateration)
2. Turbulence data using airborne EDR (Eddy Dissipation Rate) observation
3. Relative humidity data observed by water vapor sensors installed on aircraft

In FY2017, CARATS MET WG made a decision to revise the roadmap as below.



Before revision	Measure ID	Measure name	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026 and beyond
	EN-4-3	Enhanced weather observation capability / Use of aircraft-based observations		<div>Utilization of aircraft-based observations</div>								



After revision	Measure ID	Measure name	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026 and beyond	
	EN-4-3	Enhanced weather observation capability / Use of aircraft-based observations		<div>Utilization of in-situ aircraft-based observations by DAPs</div>									
							<div>Utilization of in-situ EDR</div>						
				<div>Utilization of in-situ moisture observations by sensors newly attached on aircraft</div>									

Utilization of wind direction and speed data calculated from DAPs

- In Japan, airframes that can directly downlink wind data as DAPs are very few (less than 1% of the registered airframes).
- Wind direction and speed can be calculated using dynamic information of DAPs, such as air speed, ground speed, magnetic heading, and true track angle.
- ENRI (Electronic Navigation Research Institute) validated the quality of wind data calculated from DAPs downlinked to ENRI's experimental radar stations and confirmed that the data meet WMO's desired accuracy (WMO No.958: Aircraft Meteorological Data Relay (AMDAR) Reference Manual).
- Positive impact on JMA's numerical weather prediction model was found.

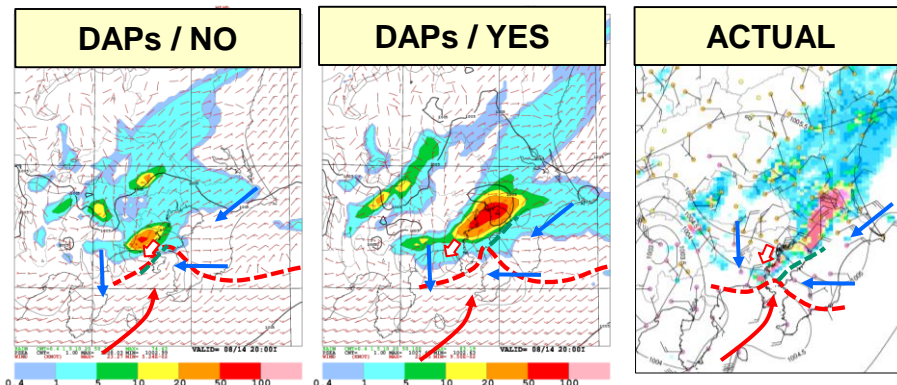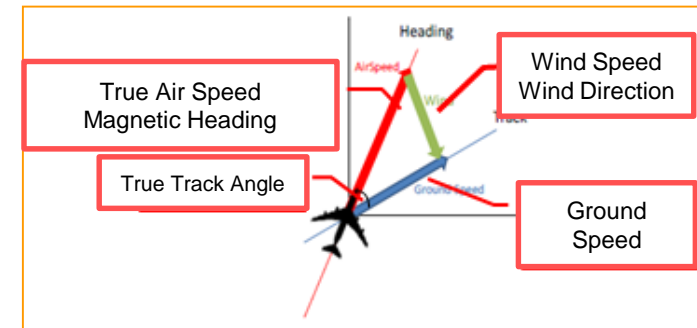

With wind data from DAPs, locations of convective clouds and shear lines of surface wind are predicted closer to actual observation.



Expectations for the improvement of accuracy

Utilization of DAPs data was endorsed by the CARATS Steering Committee in March 2018. Implementation is postponed for 1 year in accordance with JCAB's preparation plan of SSR or WAM.

Utilization of in-situ EDR

- In FY2018, the MET WG conduct a study on utilization of EDR (defined as the cube root of the eddy dissipation rate) downlinked from aircraft as a metric of turbulence intensity.
- Following points are considered as possible advantages.
 - Objectivity of observation data
 - Expectations for improvement of prediction accuracy
 - Possibility for reducing workloads of pilots and ATCs
- Decision will be made by FY2020, because EDR is already ICAO standard in Annex 3.

Utilization of in-situ relative humidity observations

- Currently, water vapor sensor has been implemented in some airlines in the United States.
- Further study on water vapor sensor implementation is required for future implementation, including;
 - Possible benefit (e.g. improvement of numerical weather prediction)
 - Technical/financial issues for installation

- In the CARATS project of Japan, renovation of Air Traffic System has been discussed among various stakeholders, such as government organizations, research institutes, manufacturers and airlines.
- The measures relating aeronautical meteorology will be effective to address increase of air traffic, to improve safety and efficiency on aircraft operations, and to realize Trajectory-based Operation (TBO) which is one of the main directions of renovation in CARATS.

Thank you!